



Trap Adjustments

The Tru-Catch Trap Tool is used to make minor adjustments when a trap is not setting as it should.

If you don't have a trap tool just use a pair of pliers handles to apply upward or downward pressure, tweaking the door in the necessary direction.


Some traps need minor adjustments for optimal tripping and others that have been in use for some time occasionally need to be calibrated. This simple trick can have you back to trapping in no time.



When the trap is set, if the front door is too elevated, the trigger bar doesn't have enough friction to stay set.



When the trap is set, if the front door is too low, the trigger bar has too much friction and the trap will not trip.

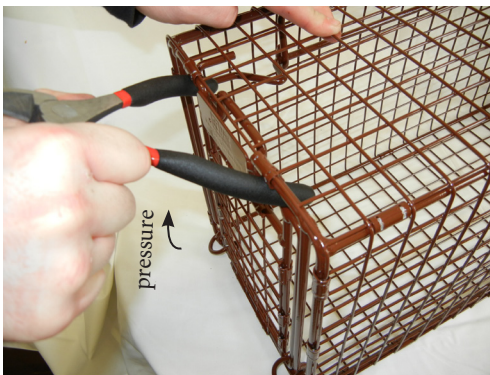

If this is the case, use the tool or plier handles to pry **out** on the door frame using **upward** force.

If this is the case, use the tool or plier handles to pry **in** on the door frame using **downward** force.



Ultimately the door should be parallel with the ground with the trigger set.



Ultimately the door should be parallel with the ground with the trigger set.